


# DeckerSealing™ DR Series

## 55 Gallon Drum Supply Pump

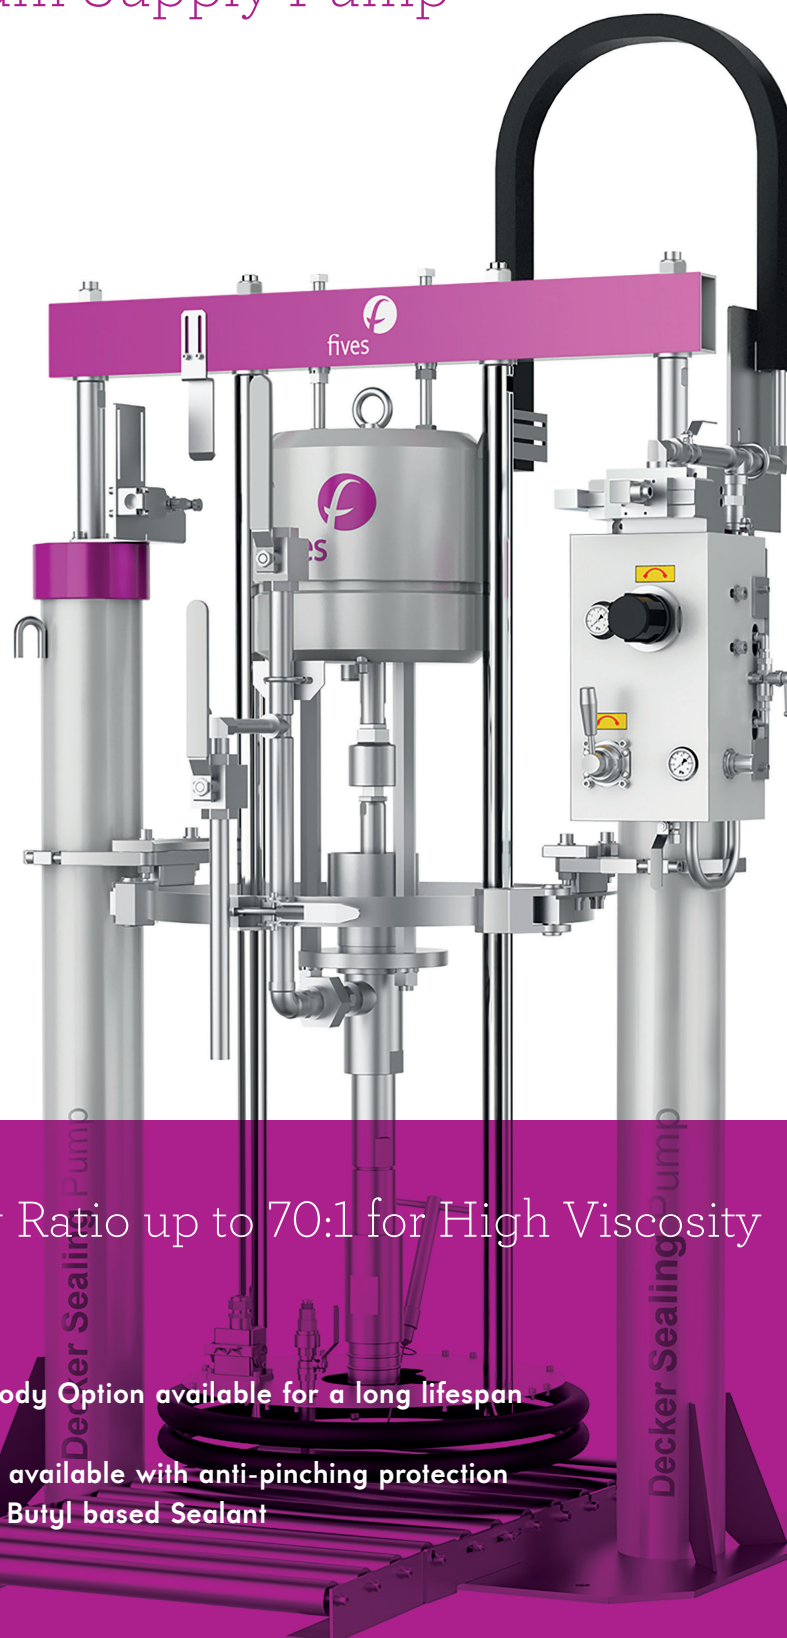


High Pumping Ratio up to 70:1 for High Viscosity

- Tungsten inner pump body Option available for a long lifespan
- Reduced glue waste
- Operator safety device available with anti-pinching protection
- Special Seal design for Butyl based Sealant

# High pumping ratio (70.1) long distance transfer of high viscosity material

## OPERATOR SAFETY

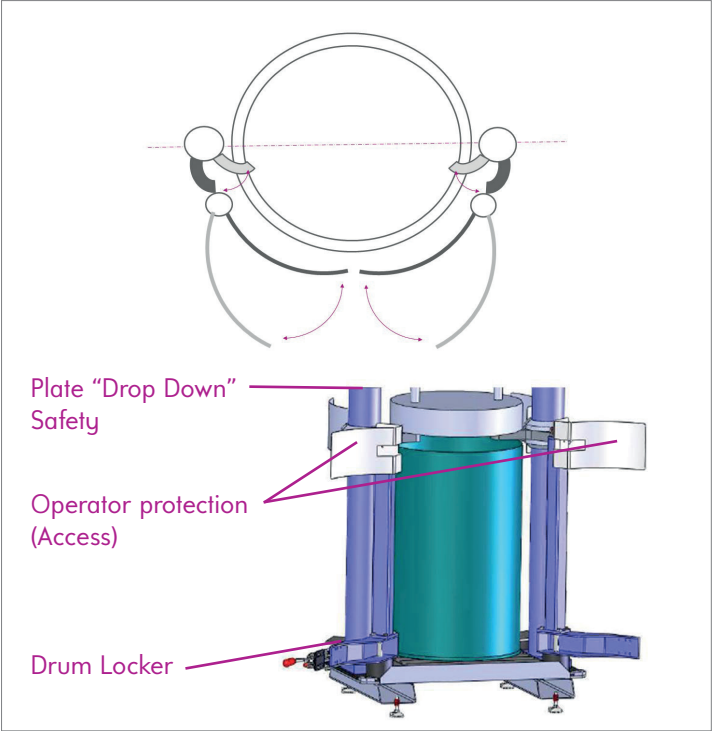

## SPECIFICATION

Product Type	DR7019
Pressure Ratio	70:1
Max Pressure (MPa)	35
Capacity (cc/st)	190
Max Flow Rate (l/min)	6
Elevator	Double (Ø125)
Press Force N(Air=0.5MPa)	11000
Outlet Size (PT)	1"
Dimension (WxLxH mm)	1160x650x1615 (Max 2693)
Weight (kg)	345

## OPTION

Pump Body	Tungsten (Foot valve and shuttle valve), Hard Chrome plated inner pump body
Pump Heater	Pump body and follow plate heating device
Teflon Coated Follow Plate	For Urethane based material
Operator Safety	Anti-pinching protection

## APPLICATION

Material	Butyl, Epoxy, Grease, Mastic, Silicone, Urethane
----------	--

The information provided on this document is for information purposes only and does not constitute a legal obligation or a warranty, express or implied, of any kind.