


DeckerSealing™ Automatic Dispensers

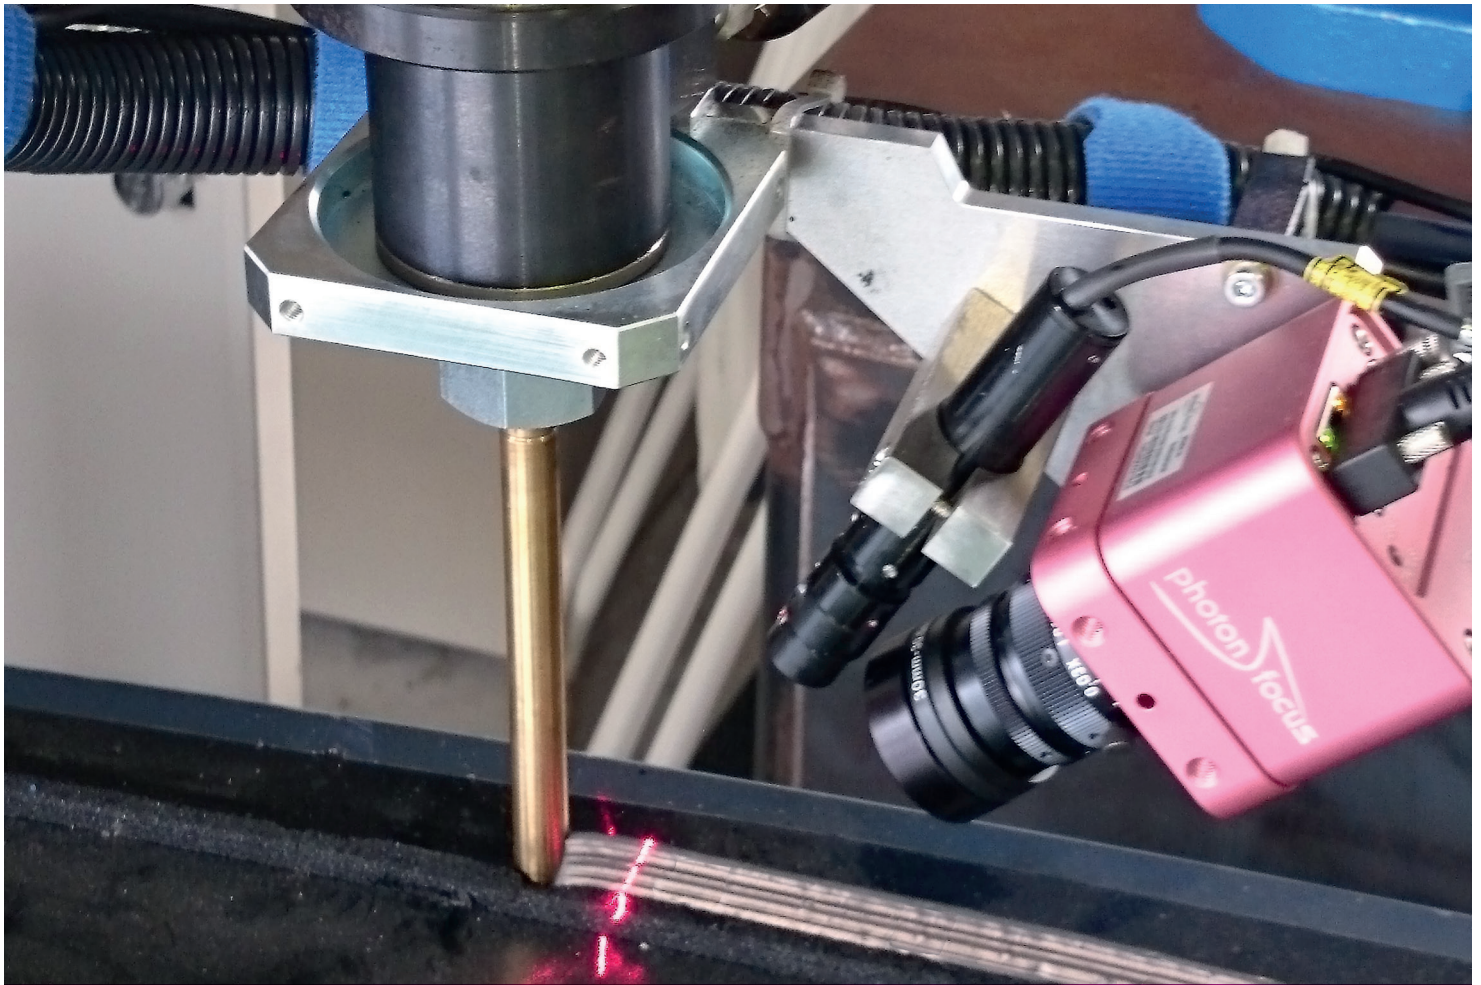


All Applications Sealing Dispensers

- A complete range of sealing dispensers available to meet all applications and requirements
- All bead patterns available
- Contact and non-contact dispensing tips
- Repeatable setup during change over

DeckerSealing™ Dispensers

For all types of Bead

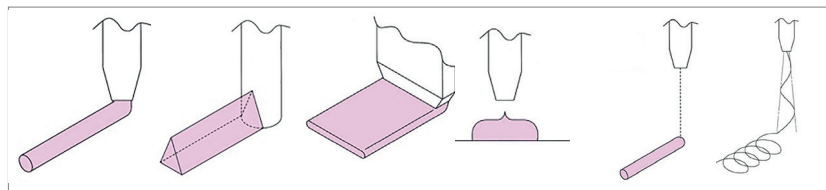

Normal Type

Spray Type



SCAD-500



SCAD-650

SPECIFICATION

Product Type	SCAD-500	SCAD-650	SCAD-900
Working Pressure (MPa)	20		
Flow Rate (l/min)	3	2.5	3
Bore Size (mm)	7	5	6
Inlet Size (PT)	3/8"	1/4"	3/8"
Air Inlet Size (PT)	1/8"		
Weight (kg)	2.3	1.3	2.6
Feature	Rotary Dispenser Head	Light Weight Dispenser	Heated Dispenser

OPTION

Type	High Viscosity	Heated Tungsten Valve	-
	Heated	Double Tightness	-

APPLICATION


Material	Butyl, Epoxy, Grease, Mastic, Silicone, Urethane
----------	--

DeckerSealing™ Mixers

Dispensing for 2K solution



Static Mixer

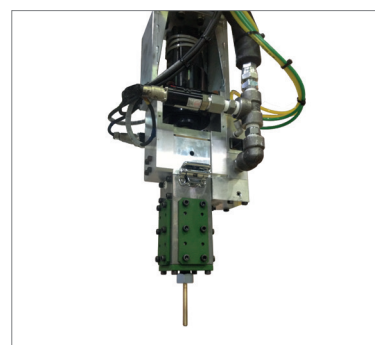

Dynamic Mixer

SPECIFICATION

Product Type	Static Mixer	Dynamic Mixer
Max Pressure (MPa)	15	
Max Flow Rate (l/min)	1.2	1
Bead	Taylor	

APPLICATION

Material	Butyl, Epoxy, Mastic, Silicone, Urethane
----------	--

The information provided on this document is for information purposes only and does not constitute a legal obligation or a warranty, express or implied, of any kind.